

# Cairfog instruction




MODEL : CF1901-TM

# [ ACCESSARY ]

- POWER CORD
- MANUAL

Electrical steam injector CF1901-TM	
Voltage(V), Power(W)	220V, 1500W
Heater temperature	240~260°C
Working time	Approximately 6 to 8 minutes after operating the start button (There is a difference in preheating time by season)
Injection capacity	20ml/min
IP rating	IP x 4 (Protects from splashing water)
Maximum operating pressure	3 bar
Maximum temperature of injection steam	80°C
Weight	2.6kg
Manufacturer	Tomato A&P Co.,Ltd
Distributor	Nexolwizvil Co., Ltd
Contact	02-850-0048

# [ Configuration ]

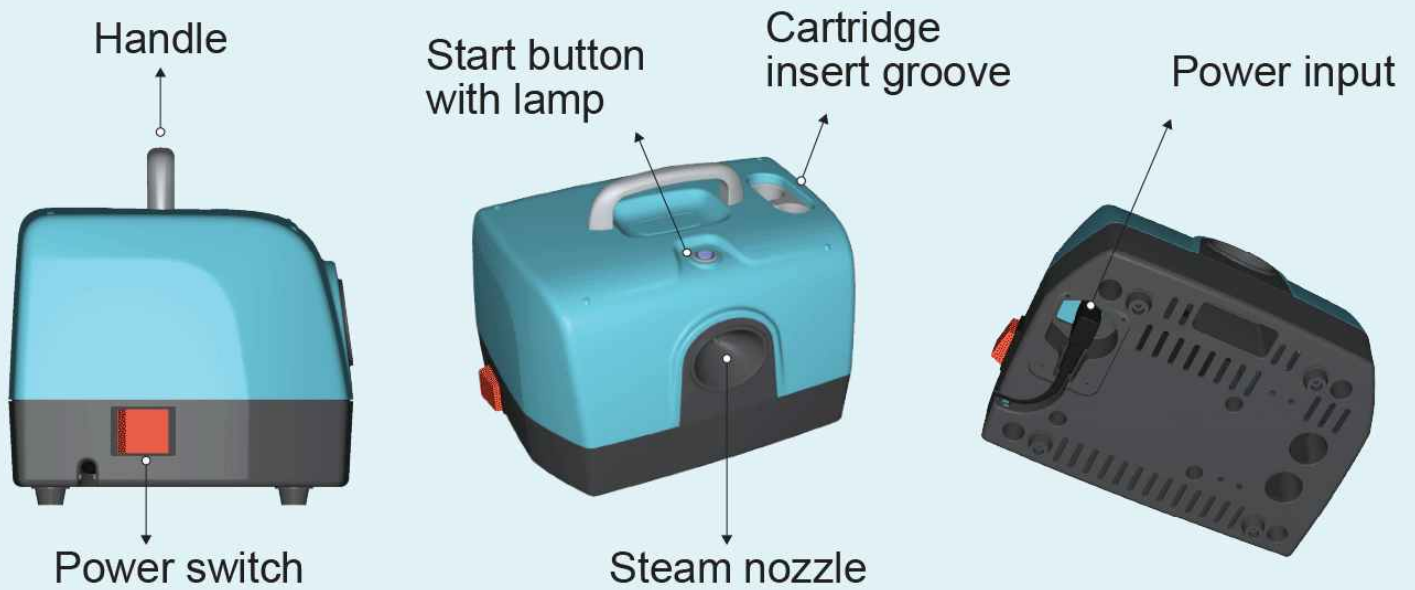

## Safety Tips

- Please familiarize yourself with all the rules to ensure safe use of the product.
- If the product is not used in accordance with the instructions, the safety device built into the product may be adversely affected.
- It should not be sprayed directly on people or animals, and should not be used while in a vehicle.
- Do not spray on people or animals.
- Repairs to the product (including power cord) should only be carried out by qualified personnel.
- This machine is not intended for use by anyone (including children) who lacks physical, sensory, or mental capabilities or lacks experience and knowledge and can not use the machine safely without supervision or knowledge. Especially children, please do not use.
- Inserting flammable liquid into the equipment may cause fire or malfunction.
- Using other products other than the specified cartridge may cause malfunction.

## Product Usage

1. Start the car and set the air conditioner as follows.  
Air conditioner or heater (ON) / Lowest temperature / Wind direction (Front) / Internal circulation / Maximum air flow  
\* Turn off the air conditioner when working directly on a vehicle that has kept an air conditioner on.
2. Connect the power cable to the power input of the machine and to the power outlet.
3. Turn on the power switch (The lamp of the start button lights up / standby mode)
4. Open the cap on the cartridge. Do not remove the sealing. Insert it into the cartridge inserting groove on the machine, and lightly press it.
5. Open the passenger door and place it on the floor of the passenger seat and point the nozzle forward.
6. Press the start button on the machine and close the passenger door.
  - When the preheating is complete, the machine starts work automatically and the lamp of the start button blinks.
  - The operation time of the machine is about 6-8 minutes. When the operation is completed, it automatically switches to standby mode (The lamp of the start button is on).
  - When the machine has finished operating, put off the machine from the car, turn off the air conditioner, and keep the ventilation mode for 5 to 10 minutes.
7. To complete, open all doors and ventilate the vehicle.  
※ CairFog work takes about 10 ~ 20 minutes.